

1N957B-1 thru 1N986B-1




Silicon Zener Diode Series

Rev. V2

Features

- 1N962B-1 thru 1N986B-1 Available in JAN, JANTX and JANTXV per MIL-PRF-19500/117
- Standard voltage tolerances are plus/minus 5% with B suffix, 10% with A suffix identification.
- Tight tolerances available in plus or minus 2% or 1% with C or D suffix respectively.
- 500 mW power handling
- Hermetically sealed axial-leaded glass DO-35 package.



Electrical Specifications: $T_A = +25^\circ\text{C}$ (unless otherwise specified)

Part # ¹	Normal Zener Voltage V_Z	Zener Test Current I_{ZT}	Max. Zener Impedance			Max. DC Zener Current I_{ZM}	Max. Surge Current I_{ZSM}	Max. Reverse Leakage $I_R @ V_R$		Max. Temperature Coefficient a_{V_Z}
	Volts	mA	$Z_{ZT} @ I_{ZT}$ Ohms	Z_{ZK} Ohms	@ I_{ZK} mA	mA	mA	mA	Volts	%/°C
1N957B-1	6.8	18.5	4.5	700	1.0	55	300	150	5.2	0.050
1N958B-1	7.5	16.5	5.5	700	0.5	50	275	75	5.7	0.058
1N959B-1	8.2	15.0	6.5	700	0.5	45	250	50	6.2	0.065
1N960B-1	9.1	14.0	7.5	700	0.5	41	225	25	6.9	0.068
1N961B-1	10	12.5	8.5	700	0.25	38	200	10	7.6	0.075
1N962B-1	11	11.5	9.5	700	0.25	32	175	5	8.4	0.076
1N963B-1	12	10.5	11.5	700	0.25	31	160	5	9.1	0.077
1N964B-1	13	9.5	13	700	0.25	28	150	5	9.9	0.079
1N965B-1	15	8.5	16	700	0.25	25	130	5	11.4	0.082
1N966B-1	16	7.8	17	700	0.25	24	120	5	12.2	0.083
1N967B-1	18	7.0	21	750	0.25	20	110	5	13.7	0.085
1N968B-1	20	6.2	25	750	0.25	18	100	5	15.2	0.086
1N969B-1	22	5.6	29	750	0.25	16	90	5	16.7	0.087
1N970B-1	24	5.2	33	750	0.25	15	80	5	18.2	0.088

1. The JEDEC type numbers shown (B Suffix) have a +5% tolerance on nominal Zener Voltage. The suffix A is used to identify +10% tolerance; suffix C is used to identify +2%; and suffix D is used identify +1%; no suffix indicates +20%.

Continued on next page

1N957B-1 thru 1N986B-1



Silicon Zener Diode Series

Rev. V2

Electrical Specifications: $T_A = +25^\circ\text{C}$ (unless otherwise specified)

Part # ¹	Normal Zener Voltage V_Z	Zener Test Current I_{ZT}	Max. Zener Impedance			Max. DC Zener Current I_{ZM}	Max. Surge Current I_{ZSM}	Max. Reverse Leakage $I_R @ V_R$		Max. Temperature Coefficient a_{V_Z}
	Volts	mA	$Z_{ZT} @ I_{ZT}$ Ohms	Z_{ZK} Ohms	@ I_{ZK} mA	mA	mA	mA	Volts	%/ $^\circ\text{C}$
1N971B-1	27	4.6	41	750	0.25	13	70	5	20.6	0.090
1N972B-1	30	4.2	49	1000	0.25	12	65	5	22.8	0.091
1N973B-1	33	3.8	58	1000	0.25	11	60	5	25.1	0.092
1N974B-1	36	3.4	70	1000	0.25	10	55	5	27.4	0.093
1N975B-1	39	3.2	80	1000	0.25	9.5	46	5	29.7	0.094
1N976B-1	43	3.0	93	1000	0.25	8.8	44	5	32.7	0.095
1N977B-1	47	2.7	105	1500	0.25	7.9	40	5	35.8	0.095
1N978B-1	51	2.5	125	1500	0.25	7.4	37	5	38.8	0.096
1N979B-1	56	2.2	150	2000	0.25	6.8	35	5	42.6	0.096
1N980B-1	62	2.0	185	2000	0.25	6.0	30	5	47.1	0.097
1N981B-1	68	1.8	230	2000	0.25	5.5	28	5	51.7	0.097
1N982B-1	75	1.7	270	2000	0.25	5.0	26	5	56.0	0.098
1N983B-1	82	1.5	330	3000	0.25	4.6	23	5	62.2	0.098
1N984B-1	91	1.4	400	3000	0.25	4.1	21	5	69.2	0.099
1N985B-1	100	1.3	500	3000	0.25	3.7	18	5	76.0	0.110
1N986B-1	110	1.1	750	4000	0.25	3.3	16	5	83.6	0.110

1. The JEDEC type numbers shown (B Suffix) have a +5% tolerance on nominal Zener Voltage. The suffix A is used to identify +10% tolerance; suffix C is used to identify +2%; and suffix D is used identify +1%; no suffix indicates +20%.

Absolute Maximum Ratings^{2,3}

Parameter	Absolute Maximum
Thermal Resistance	250 $^\circ\text{C}/\text{W}$
Steady-State Power	0.5 W
Forward Voltage	1.1 V @ 200 mA
Operating / Storage Temperature	-65 $^\circ\text{C}$ to +175 $^\circ\text{C}$

2. Exceeding any one or combination of these limits may cause permanent damage to this device.
 3. VPT Components does not recommend sustained operation near these survivability limits.

1N957B-1 thru 1N986B-1



Silicon Zener Diode Series

Rev. V2

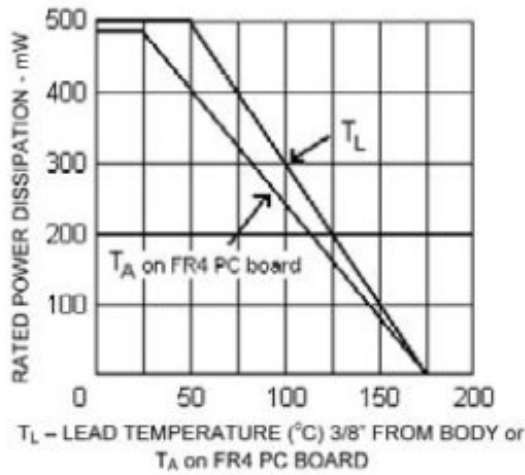


FIGURE 1
POWER DERATING CURVE

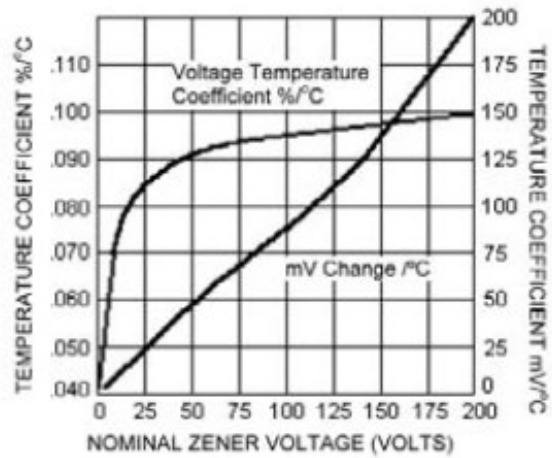


FIGURE 2
ZENER VOLTAGE TEMPERATURE COEFFICIENT vs. ZENER VOLTAGE

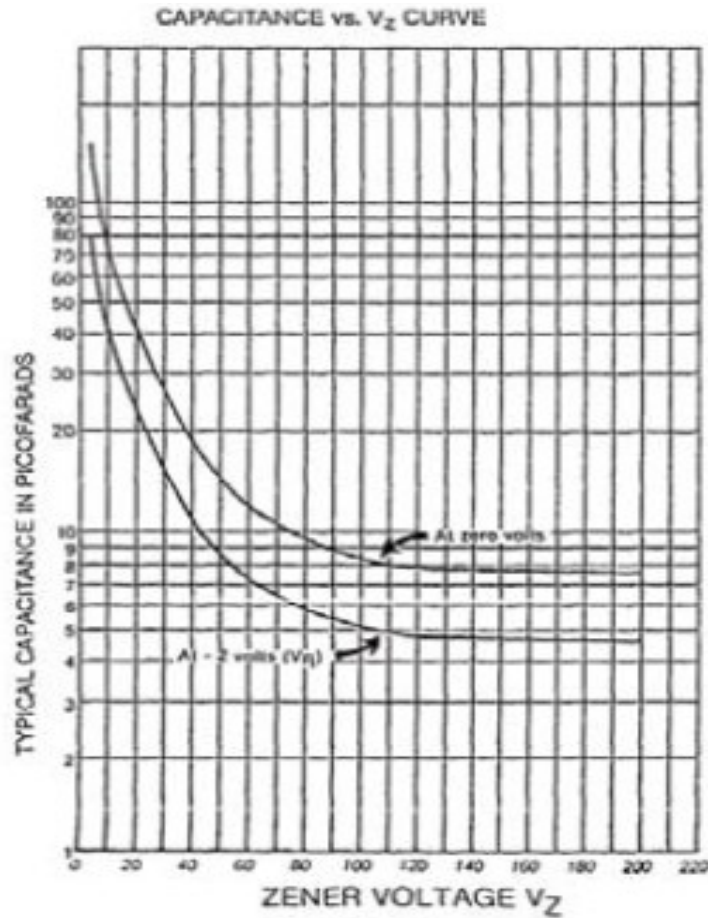


FIGURE 3
CAPACITANCE vs. ZENER VOLTAGE


1N957B-1 thru 1N986B-1



Silicon Zener Diode Series

Rev. V2

Outline Drawing

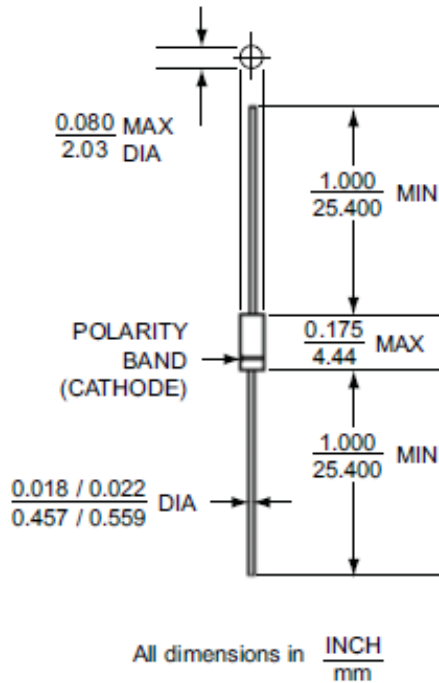

LEADED DESIGN DATA

CASE: Hermetically sealed, DO – 35

LEAD MATERIAL: Copper clad steel

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ($R_{\theta JEC}$): 70 °C/W maximum at L = 0.375 in

THERMAL IMPEDANCE: ($Z_{\theta JX}$): 12 °C/W maximum

POLARITY: Cathode end is banded.

MOUNTING POSITION: Any

VPT Components All rights reserved.

Information in this document is provided in connection with VPT Components' products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components' Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components' products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components' customers using or selling VPT Components' products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.