

1N4099UB thru 1N4135UB 1N4614UB thru 1N4627UB



Low Noise Zener Diode Series

Rev. V3

Features

- Available in JAN, JANTX, JANTXV and JANS per MIL-PRF-19500/435
- Tight tolerances available in plus or minus 2% or 1% with C or D suffix respectively.
- 500 mW power handling
- Hermetically sealed ceramic surface mount package
- Also available in axial-leaded glass DO-35 and DO-213AA MELF packages



Electrical Specifications: $T_A = +25^{\circ}\text{C}$ (unless otherwise specified)

JEDEC TYPE No. (Note1)	Normal Zener Voltage VZ @ IZT	Zener Test Current IZT	Maximum Zener Impedance ZZT	Maximum Reverse Current IR @ VR		Maximum Noise Density ND @ IZT	Maximum Zener Current IZM
	Volts	μA	Ohms	μA	Volts	$\mu\text{V} / \sqrt{\text{Hz}}$	mA
1N4099UB	6.8	250	200	10	5.17	40	56
1N4100UB	7.5	250	200	10	5.7	40	51
1N4101UB	8.2	250	200	1	6.24	40	46
1N4102UB	8.7	250	200	1	6.61	40	44
1N4103UB	9.1	250	200	1	6.92	40	42
1N4104UB	10	250	200	1	7.6	40	38
1N4105UB	11	250	200	0.05	8.44	40	35
1N4106UB	12	250	200	0.05	8.12	40	32
1N4107UB	13	250	200	0.05	9.857	40	29
1N4108UB	14	250	200	0.05	10.65	40	27
1N4109UB	15	250	100	0.05	11.4	40	25
1N4110UB	16	250	100	0.05	12.15	40	24
1N4111UB	17	250	100	0.05	12.92	40	22
1N4112UB	18	250	100	0.05	13.67	40	21
1N4113UB	19	250	150	0.05	14.44	40	20
1N4114UB	20	250	150	0.01	15.2	40	19
1N4115UB	22	250	150	0.01	16.72	40	17
1N4116UB	24	250	150	0.01	18.25	40	16
1N4117UB	25	250	150	0.01	19	40	15
1N4118UB	27	250	150	0.01	20.45	40	14
1N4119UB	29	250	200	0.01	21.28	40	14
1N4120UB	30	250	200	0.01	22.8	40	13

(Continued next page)

1N4099UB thru 1N4135UB 1N4614UB thru 1N4627UB



Low Noise Zener Diode Series

Rev. V3

Electrical Specifications: $T_A = +25^{\circ}\text{C}$ (unless otherwise specified)

JEDEC TYPE No. (Note1)	Normal Zener Voltage VZ @ IZT	Zener Test Current IZT	Maximum Zener Impedance ZZT	Maximum Reverse Current IR @ VR		Maximum Noise Density ND @ IZT	Maximum Zener Current IZM
	Volts	A	Ohms	A	Volts	V / $\sqrt{\text{Hz}}$	mA
1N4121UB	33	250	200	0.01	25.08	40	12
1N4122UB	36	250	200	0.01	27.38	40	11
1N4123UB	39	250	200	0.01	29.65	40	9.8
1N4124UB	43	250	250	0.01	32.65	40	8.9
1N4125UB	47	250	250	0.01	35.75	40	8.1
1N4126UB	51	250	300	0.01	38.76	40	7.5
1N4127UB	56	250	300	0.01	42.6	40	6.7
1N4128UB	60	250	400	0.01	45.6	40	6.4
1N4129UB	62	250	500	0.01	47.1	40	6.1
1N4130UB	68	250	700	0.01	51.68	40	5.6
1N4131UB	75	250	700	0.01	57	40	5.1
1N4132UB	82	250	800	0.01	62.32	40	4.6
1N4133UB	87	250	1000	0.01	66.12	40	4.4
1N4134UB	91	250	1200	0.01	69.16	40	4.2
1N4135UB	100	250	1500	0.01	76	40	3
1N4614UB	1.8	250	1200	7.5	1	1	120
1N4615UB	2	250	1250	5	1	1	110
1N4616UB	2.2	250	1300	4	1	1	100
1N4617UB	2.4	250	1400	2	1	1	95
1N4618UB	2.7	250	1500	1	1	1	90
1N4619UB	3	250	1600	0.8	1	1	87
1N4620UB	3.3	250	1650	7.5	1.5	1	85
1N4621UB	3.6	250	1700	7.5	2	1	83
1N4622UB	3.9	250	1650	5	2	1	80
1N4623UB	4.3	250	1600	4	2	1	77
1N4624UB	4.7	250	1550	10	2	1	75
1N4625UB	5.1	250	1500	10	3	2	70
1N4626UB	5.6	250	1400	10	4	4	65
1N4627UB	6.2	250	1200	10	5	5	61

1. The JEDEC type numbers shown with no suffix have a standard tolerance of +5% on the nominal Zener voltage; suffix C is used to identify +2%; and suffix D is used identify +1% tolerance. Vz is measured with the diode in thermal equilibrium in 25°C still air.

Absolute Maximum Ratings


Parameter	Absolute Maximum
Steady State Power Dissipation	0.5 W
Forward Voltage	1.1 V @ 200 mA
Thermal Resistance	90°C/W
Operating & Storage Temperature	-65°C to +175°C

1N4099UB thru 1N4135UB 1N4614UB thru 1N4627UB

Low Noise Zener Diode Series

Rev. V3

Outline Drawing (UB)

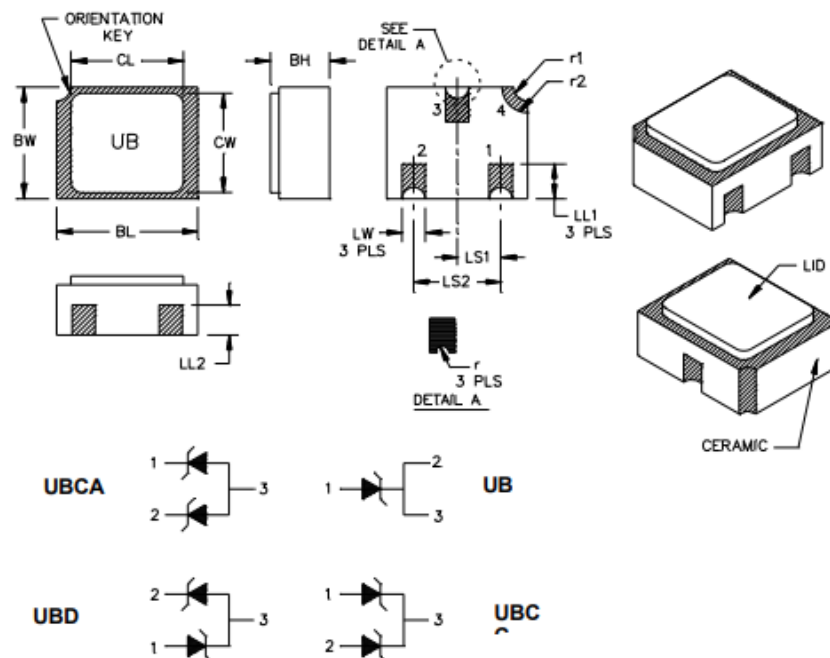

Symbol	Dimensions				Symbol	Dimensions			
	Inches		Millimeters			Inches		Millimeters	
	Min	Max	Min	Max		Min	Max	Min	Max
BH	.046	.056	1.17	1.42	LS1	.035	.039	0.89	0.99
BL	.115	.128	2.92	3.25	LS2	.071	.079	1.80	2.01
BW	.085	.108	2.16	2.74	LW	.016	.024	0.41	0.61
CL		.128		3.25	r		.008		0.20
CW		.108		2.74	r1		.012		0.31
LL1	.022	.038	0.56	0.97	r2		.022		0.56
LL2	.017	.035	0.43	0.89					

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Ceramic package only.
3. Hatched areas on package denote metallized areas. Pad 4 = shielding, connected to the lid.
4. Dimensions are pre-solder dip.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

* FIGURE 3. Physical dimensions, surface mount (UB version).


1N4099UB thru 1N4135UB 1N4614UB thru 1N4627UB



Low Noise Zener Diode Series

Rev. V3

Thermal Impedance Curve

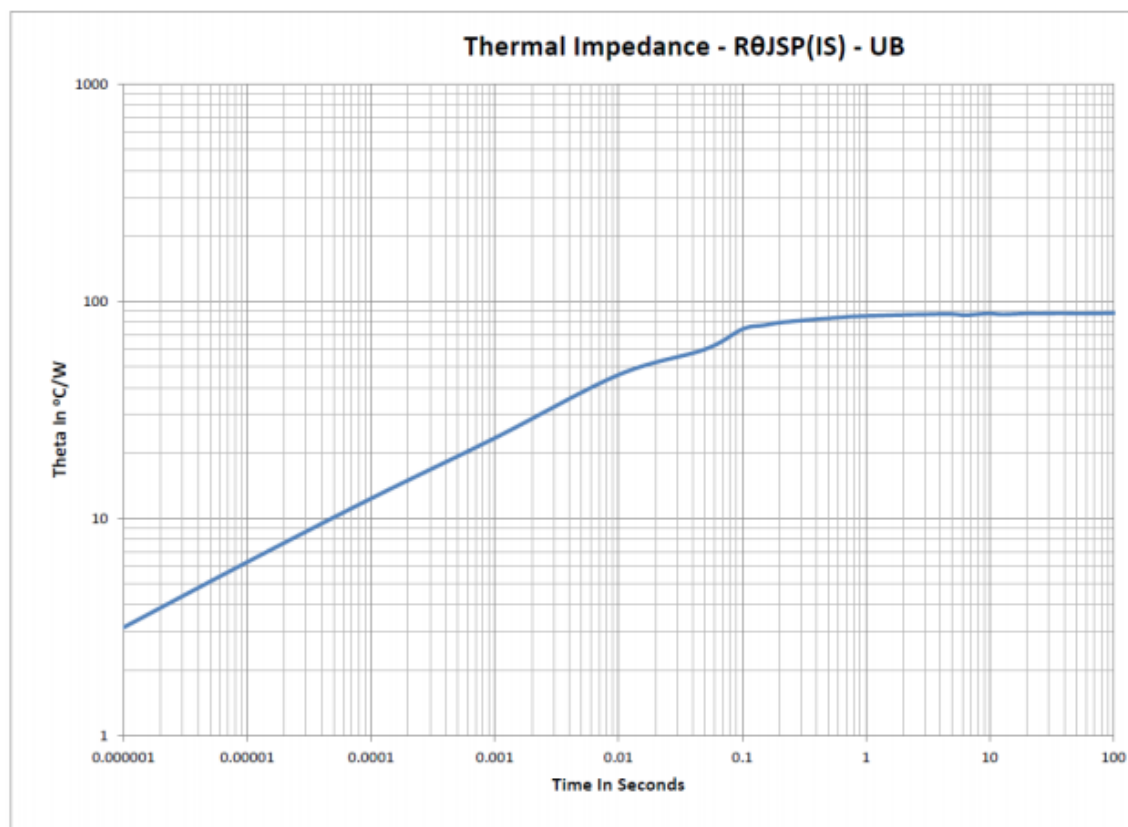

RθJPCB(1S) = 90 °C/W Thermal Impedance

Note: ZθJX = 45 °C/W maximum @ 10mS

* FIGURE 15 Thermal impedance UB.


1N4099UB thru 1N4135UB 1N4614UB thru 1N4627UB



Low Noise Zener Diode Series

Rev. V3

Thermal Impedance Curve

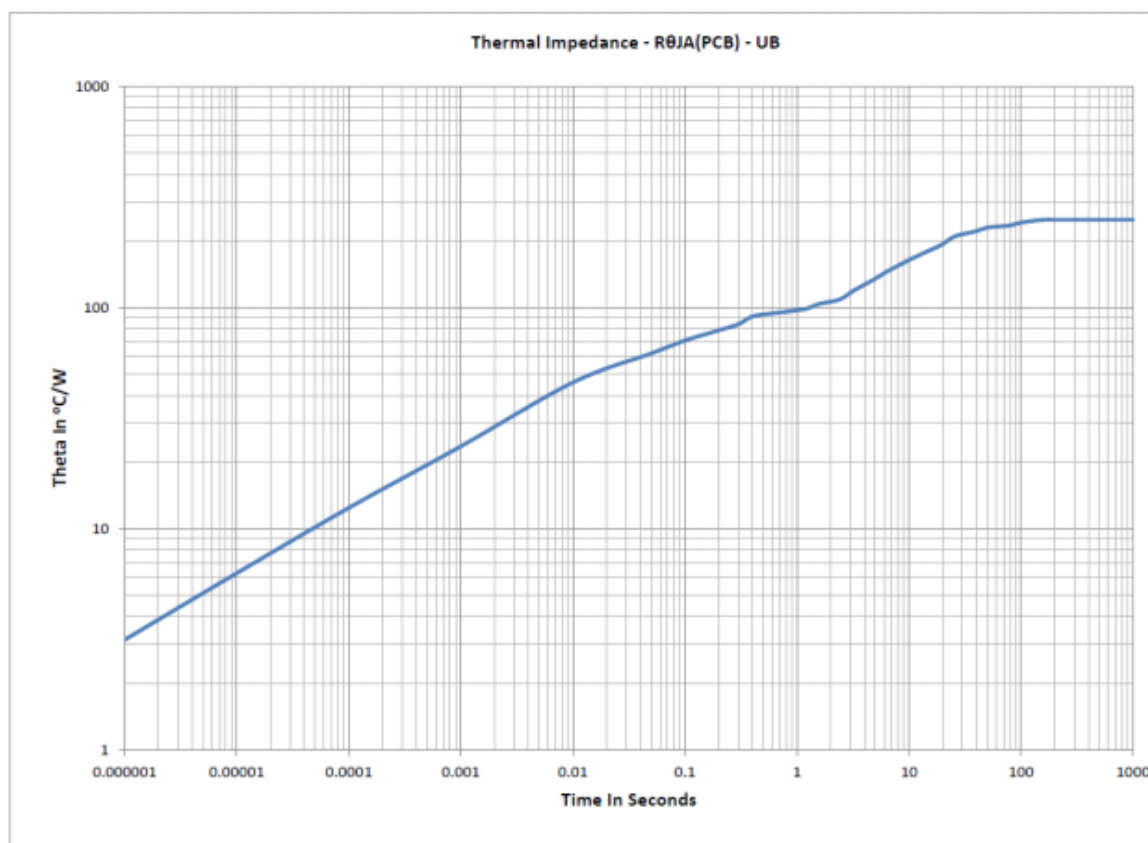

R θ JA(PCB) = 250°C/W Thermal Impedance
Note: Z θ JX = 45°C/W maximum @10mS

* FIGURE 16 Thermal impedance UB.

1N4099UB thru 1N4135UB 1N4614UB thru 1N4627UB



Low Noise Zener Diode Series

Rev. V3

VPT Components, All rights reserved.

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or